HY series

HY02401

AIR-OIL HEAT EXCHANGERS

IP44

230 Volt

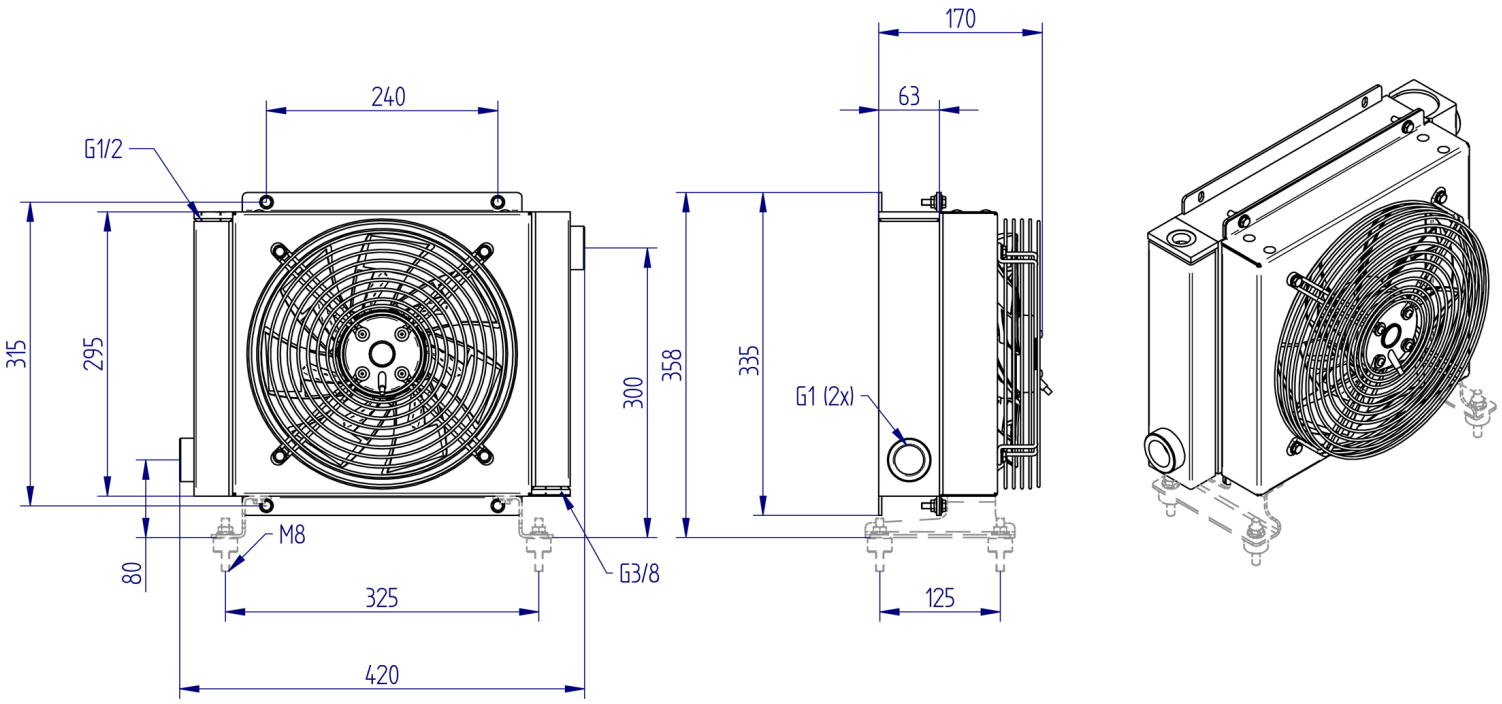

Technical data

Item	Oil flow	Capacity	Weight	Voltage	Frequency	Current absorption	Power	Ø Fan	Air flow	Noise level	Rpm
	(l/min)	(l)	(kg)	(V)	(Hz)	(A)	(W)	(mm)	(m^3/h)	(db(A))	
HY02401	20-140	2	12	230	50/60	0,57	125	250	1280	68	
HY02403	20-140	2	12	230/400	50/60	0,24	154	250	1300	69	

Performance

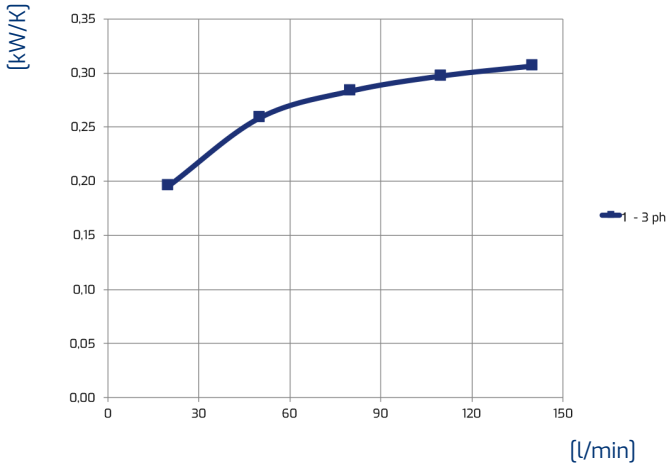

Oil T 80°C
T Amb. 40°C
1 kW = 860 Kcal/h – 1 HP = 0,75 kW

Pressure drop

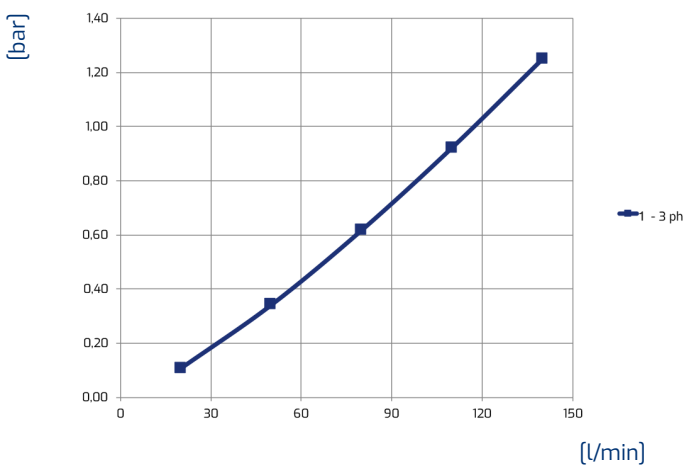

ISO VG 32 at 40°C

Viscosity - ISO VG 32 Oil

Oil	22	**32**	46	68	150
Correction factor	0,8	**1**	1,2	1,6	3

Technical data are not binding

HY series

HY02402

AIR-OIL HEAT EXCHANGERS

IP68

12 Volt

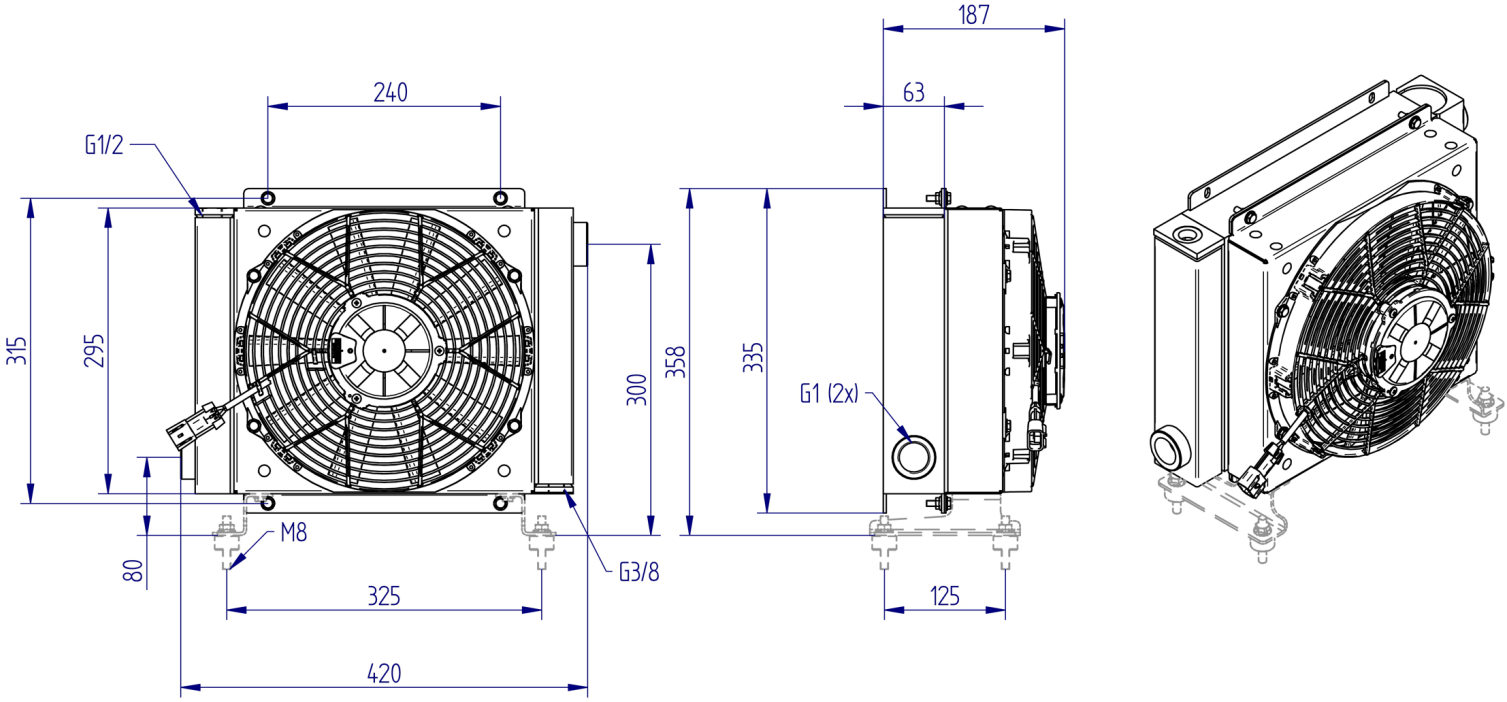

Technical data

Item	Oil flow	Capacity	Weight	Voltage	Frequency	Current absorption	Power	Ø Fan	Air flow	Noise level	Rpm
	(l/min)	(l)	(kg)	(V)	(Hz)	(A)	(W)	(mm)	(m^3/h)	(db(A))	
HY02402	20-140	2	11	12		9,40	120	280	1230	75	
HY02404	20-140	2	11	24		4,70	120	280	1235	74	

Performance

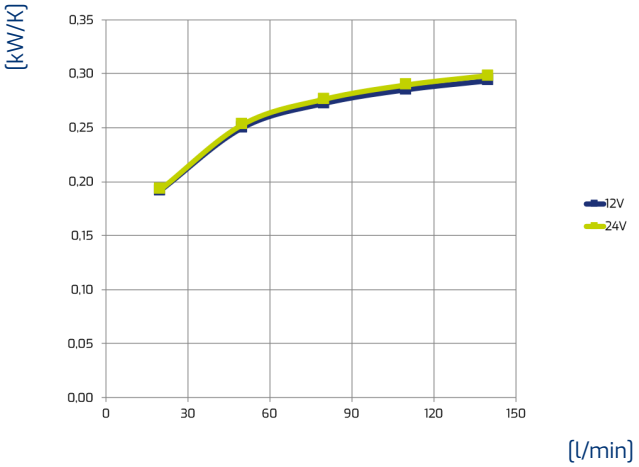

Oil T 80°C
T Amb. 40°C
1 kW = 860 Kcal/h – 1 HP = 0,75 kW

Pressure drop

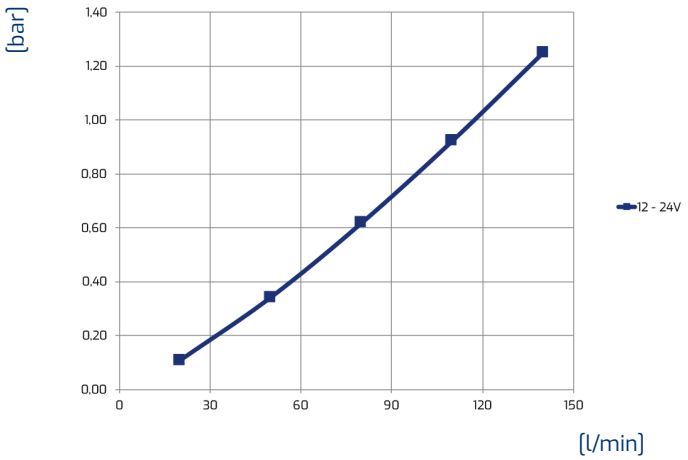

ISO VG 32 at 40°C

Viscosity - ISO VG 32 Oil

Oil	22	**32**	46	68	150
Correction factor	0,8	**1**	1,2	1,6	3

Technical data are not binding

HY series

HY02404

AIR-OIL HEAT EXCHANGERS

IP68

24 Volt

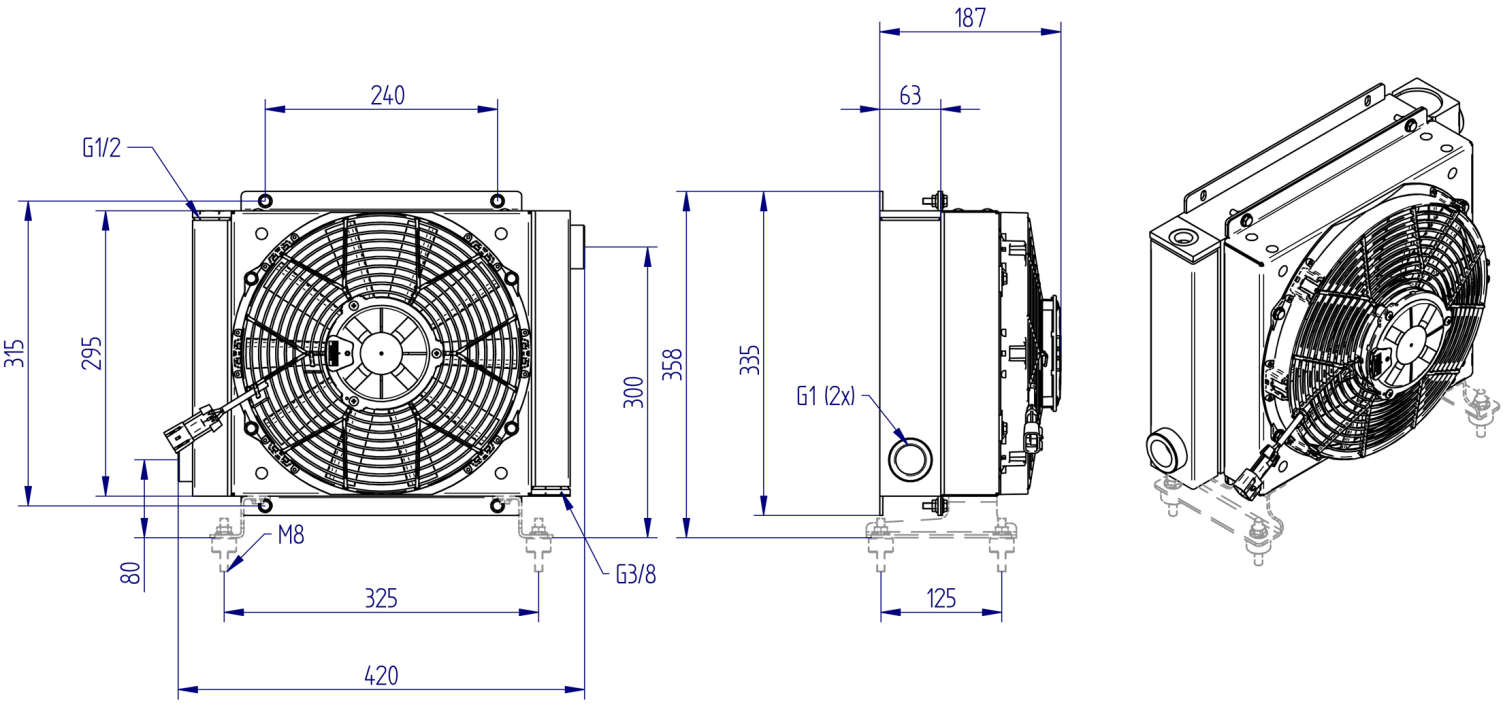

Technical data

Item	Oil flow	Capacity	Weight	Voltage	Frequency	Current absorption	Power	Ø Fan	Air flow	Noise level	Rpm
	(l/min)	(l)	(kg)	(V)	(Hz)	(A)	(W)	(mm)	(m^3/h)	(db(A))	
HY02402	20-140	2	11	12		9,40	120	280	1230	75	
HY02404	20-140	2	11	24		4,70	120	280	1235	74	

Performance

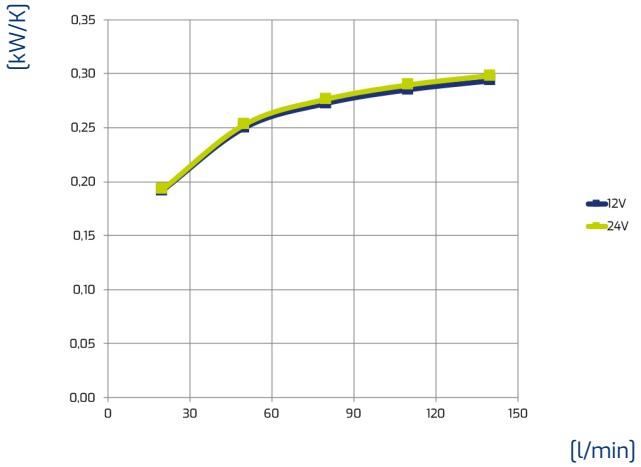

Oil T 80°C
T Amb. 40°C
1 kW = 860 Kcal/h – 1 HP = 0,75 kW

Pressure drop

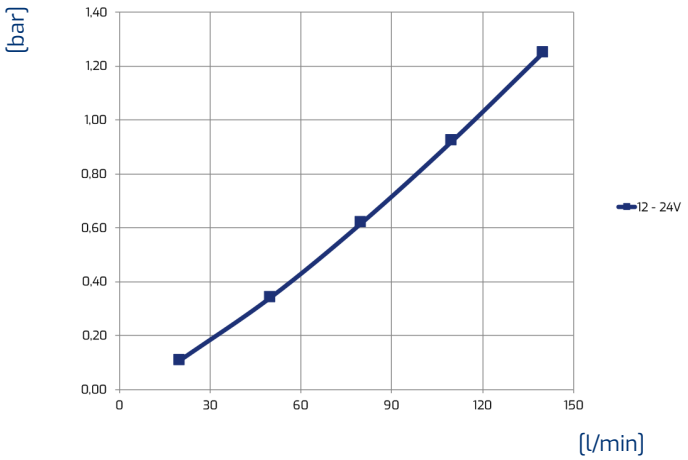

ISO VG 32 at 40°C

Viscosity - ISO VG 32 Oil

Oil	22	**32**	46	68	150
Correction factor	0,8	**1**	1,2	1,6	3

Technical data are not binding